



VENCORE
ALLIANCE

PRODUCT CATALOG

Vencore Alliance is a leading brand in the steel industry, providing high-quality steel trading and distribution services to meet the demands of global markets. We offer expert consultation services to help businesses operate more smoothly. With a global footprint spanning from Asia to Africa, we are committed to supporting new businesses and enterprises in the steel industry, and delivering excellence in all that we do.





VENCORE
ALLIANCE

Contents

Hot Rolled Coils	1
Galvanized Steel Coils	2
Cold Rolled Coils	3
Pre-painted Galvanized Coils	4
Hot Rolled Mild Steel Plates	5
Prime Hot Rolled Steel Billets	6
Prime Steel Wire Rods in Coils	7
Steel Deformed Bars	8
H-Beams	9
IPE	11
IPN	11
UPN – UAC	12
UPE	12
Square Bar	13
Flat Bar	14
Equal Angles	15
Round Bar	16
T-Bar	17
Hollow Sections and Pipes	18
Wire Mesh	19
Wire and Nails	20



VENCORE
ALLIANCE



Hot Rolled Coils

Standard: ASTM / BS / EN / GB / JIS

Grade:

SS400, SM400A/B/C, SM490A/B/YA/YB, SPHT-1/-2/-3/-4
S235JR/J0/J2, S275JR/J0/J2/K2, S355JR/J0/J2, SPHC/SPHD/SPHE
Q195, Q235, Q345, Q460
SG255-SG345, API5L Gr.B X42-X80, SPA H
S355MC-S700MC, SAPH310/320/400/440
SAE1006-SAE1045
ASTM A36, A572Gr.50/65, A709Gr.50W

Coil ID: 508mm / 610mm

Coil weight: 2.0MT - 36MT

Thickness:
1.2mm - 25mm

Width:
355mm - 2500mm



VENCORE
ALLIANCE



Galvanized Steel Coils

Standard: ASTM / EN / GB / JIS

Commercial Grade:

SGCC / S350GD+Z / S550GD+Z / DX51D / DX52D / DX53D

Zinc coating: Z40g/m² - Z600g/m²

Coil ID: 508mm / 610mm

Spangle: Regular / Medium / Zero

Coil weight: 2.7MT - 20MT

Thickness:
0.18mm - 4.00mm

Width:
355mm - 1250mm



VENCORE
ALLIANCE



Cold Rolled Coils

Standard: ASTM / EN / GB / JIS

Grade:

DC01-DC06, CR220IF, HC340LA, 590DP, 220P1, CR220BH, CR420, STKM 11A

DC01-DC06, SPCC-J1, SPCC-J2, SPCD, SPCE

TYH, THD, SPCC-SC, TLA

SPCC, DC01

Coil ID: 508mm / 610mm


Coil weight: 2.5MT - 25MT

Thickness:
0.12mm - 20mm

Width:
600mm - 2500mm



VENCORE
ALLIANCE

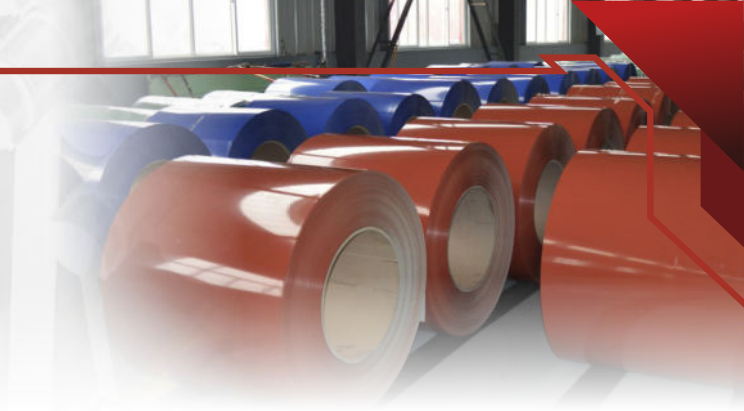


Pre-painted Galvanized Coils

Standard: ASTM / JIS / DIN / EN or equivalent	
Commercial Grade: SGCC / SPCC / DC51D / SGHC / G550 / G440	
Zinc coating: Z / AZ 30 g/m ² - 275 g/m ²	
Coil ID: 508mm / 610mm	
Color Coating: RAL basis	
Thickness: 0.11mm - 2.00mm	Width: 50mm(Slit) - 1250mm (Max)



VENCORE
ALLIANCE

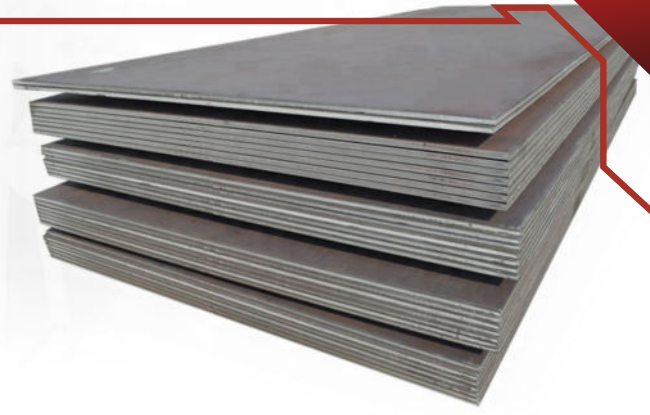


Hot Rolled Mild Steel Plates

Standard: ASTM / EN / GB / JIS		
Commercial Grade: SS400 / Q235 / S235JR / Q345 / SPHC / A36		
Thickness: 2mm - 50mm	Width: 1219mm - 2500mm	Length : 2438mm - 6096mm
High Tensile Grade(Low Carbon): S390MC / S1000MC		
Thickness: 4mm - 320mm	Width: 1219mm - 2500mm	Length: Max 15000mm



VENCORE
ALLIANCE

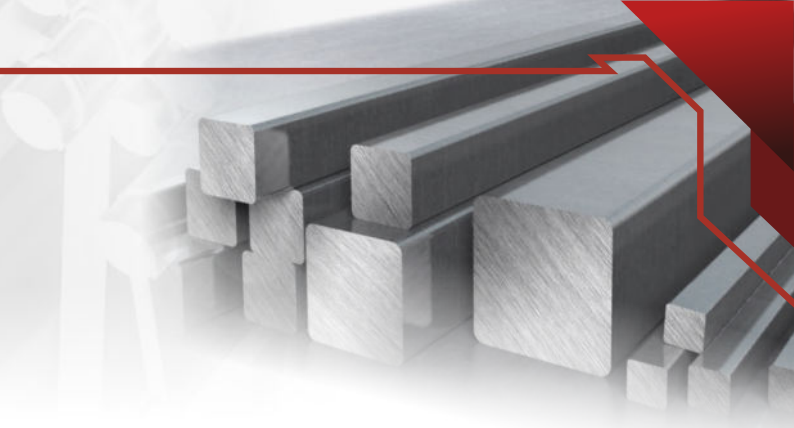

Prime Hot Rolled Steel Billets

Standard: ASTM / GOST / SAE

Commercial Grade:

3SP / 3SP Modified / 4SP / 5SP / 1006 / 1008 / 1010 / 1015

MFG Method: BOF / EAF

Sizes:

90mm x 90mm

100mm x 100mm

120mm x 120mm

130mm x 130mm

150mm x 150mm

Length:

6MTR / 12MTR



VENCORE
ALLIANCE



Prime Steel Wire Rods in Coils

Standard: ASTM / JIS

Low Carbon Grade: SAE 1006 / 1008 / 1010 / 1012 / 1015 / 1018 / 1020

Medium Carbon Grade: SAE 1030 / 1035 / 1038 / 1040 / 1541 / EN8Ds


Coil ID: 1000mm - 1250mm

Coil weight: 2.1MT - 2.5MT

Diameter:
5.5mm - 20mm



VENCORE
ALLIANCE

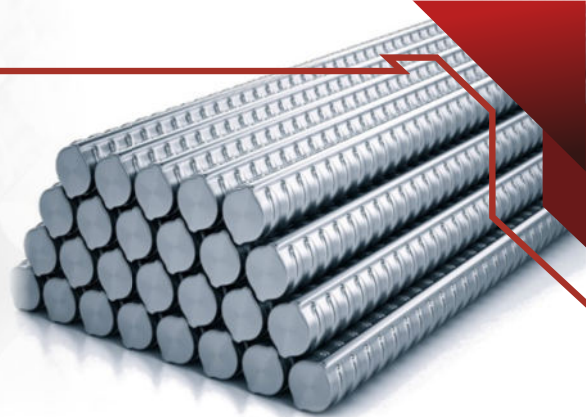

Steel Deformed Bars

Standard: BS / RB / ASTM

Commercial Grade:

Fe-415 / Fe-500 / Fe-550 / Fe-600

Diameter:
6mm - 50mm

Length:
6 Meters / 12 Meters

Grade	Yield Strength (Min. Mpa)	Tensile Strength (Min. Mpa)	Elongation Min. %
Fe 415	460.0	530	18.0
Fe 500	530.0	600	14.0
Fe 500D	530.0	600	18.0
Fe 550	580.0	650	16.0
Fe 550D	580.0	650	16.0



H-Beams

Standard: ASTM / JIS / EN / GB

Commercial Grade:


ASTM A36 / ASTM A60 / S275 / S355 / EN 10025 / JIS G3101 / Q235 / Q345

h (mm)	b (mm)	s (mm)	t (mm)	G (kg/m)
100.0	100.0	6.0	8.0	16.9
125.0	125.0	6.5	9.0	23.6
148.0	100.0	6.0	9.0	21.1
150.0	75.0	5.0	7.0	14.0
150.0	150.0	7.0	10.0	31.1
175.0	90.0	5.0	8.0	18.0
175.0	175.0	7.5	11.0	40.4
194.0	150.0	6.0	9.0	29.9
198.0	99.0	4.5	7.0	17.8
200.0	100.0	5.5	8.0	20.9
200.0	200.0	8.0	12.0	49.9
200.0	204.0	12.0	12.0	56.2
244.0	175.0	7.0	11.0	43.6
248.0	124.0	5.0	8.0	25.1
250.0	125.0	6.0	9.0	29.0
250.0	250.0	9.0	14.0	71.8
250.0	255.0	14.0	14.0	81.6
294.0	200.0	8.0	12.0	55.8
294.0	302.0	12.0	12.0	83.4
298.0	149.0	5.5	8.0	32.0
298.0	201.0	9.0	14.0	64.4
300.0	150.0	6.5	9.0	36.7
300.0	300.0	10.0	15.0	93.0
300.0	305.0	15.0	15.0	105.0
340.0	250.0	9.0	14.0	78.1
344.0	348.0	10.0	16.0	113.0
346.0	174.0	6.0	9.0	41.2
350.0	175.0	7.0	11.0	49.4
350.0	350.0	12.0	19.0	135.0
388.0	402.0	15.0	15.0	140.0
390.0	300.0	10.0	16.0	105.0
394.0	398.0	11.0	18.0	147.0



H-Beams

Standard: ASTM / JIS / EN / GB				
Commercial Grade: ASTM A36 / ASTM A60 / S275 / S355 / EN 10025 / JIS G3101 / Q235 / Q345				
h (mm)	b (mm)	s (mm)	t (mm)	G (kg/m)
396.0	199.0	7.0	11.0	56.1
400.0	200.0	8.0	13.0	65.4
400.0	150.0	8.0	13.0	55.2
400.0	400.0	13.0	21.0	172.0
414.0	405.0	18.0	28.0	232.0
414.0	202.0	10.0	20.0	93.9
440.0	300.0	11.0	18.0	121.0
446.0	199.0	8.0	12.0	65.1
450.0	200.0	9.0	14.0	74.9
482.0	300.0	11.0	15.0	111.0
488.0	300.0	11.0	18.0	125.0
496.0	199.0	9.0	14.0	77.9
500.0	200.0	10.0	16.0	88.2
506.0	201.0	11.0	19.0	102.0
582.0	300.0	12.0	17.0	133.0
588.0	300.0	12.0	20.0	147.0
594.0	302.0	14.0	23.0	170.0
596.0	199.0	10.0	15.0	92.5
600.0	200.0	11.0	17.0	103.0
600.0	304.0	16.0	26.0	194.0
606.0	201.0	12.0	20.0	118.0
692.0	300.0	13.0	20.0	163.0
700.0	300.0	13.0	24.0	182.0
792.0	300.0	14.0	22.0	188.0
800.0	300.0	14.0	26.0	207.0
900.0	300.0	16.0	28.0	240.0

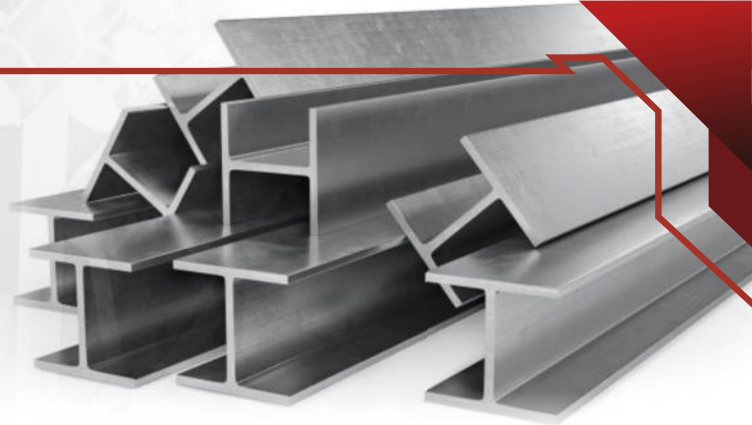

IPE

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
IPE 80	80 x 48 x 3.8	6	28	29
IPE 100	100 x 55 x 4.1	8.1	21	21
IPE 120	120 x 64 x 4.4	10.4	16	17
IPE 140	140 x 73 x 4.7	12.9	13	13
IPE 160	160 x 82 x 5	15.8	11	11
IPE 180	180 x 91 x 5.3	18.8	9	9
IPE 200	200 x 100 x 5.6	22.4	7	8
IPE 220	220 x 110 x 5.9	26.2	6	7
IPE 240	240 x 452 x 6.2	30.7	5	8
IPE 270	270 x 135 x 6.6	36.1	5	5
IPE 300	300 x 150 x 7.1	42.2	4	4
IPE A 80	78 x 46 x 3.3	5	33	34
IPE A 100	98 x 55 x 3.6	6.9	24	25
IPE A 120	117.6 x 64 x 3.8	8.7	19	20
IPE A 140	137.4 x 73 x 3.8	10.5	16	16
IPE A 160	157 x 82 x 4	12.7	13	14
IPE A 180	177 x 91 x 4.3	15.4	11	11
IPE A 200	197 x 100 x 4.5	18.4	9	9
IPE A 220	217 x 110 x 5	26.2	6	8
IPE A 240	237 x 120 x 5.2	26.2	6	7
IPE A 270	267 x 135 x 5.5	30.7	5	6
IPE A 300	297 x 150 x 6.1	36.5	5	5
IPE AA 80	78 x 46 x 3.2 x 4.2	4.9	34	35
IPE AA 100	97.6 x 55 x 3.6 x 4.5	6.7	25	26
IPE AA 120	117 x 64 x 3.8 x 4.8	8.4	20	21
IPE AA 140	136.6 x 73 x 3.8 x 5.2	10.1	17	17
IPE AA 160	156.4 x 82 x 4.0 x 5.6	12.1	14	14
IPE AAA 80	78 x 46 x 3	4.75	35	36
IPE AAA 100	97 x 55 x 3.5	6.6	25	26
IPE AAA 120	117 x 64 x 3.3	8.3	20	21
IPE AAA 140	136 x 73 x 3.2	8.8	19	20
IPE AAA 160	156.4 x 82 x 3.7	11.95	14	14
IPE AAAA 80	78 x 46 x 2.5	3.92	43	44
IPE AAAA 100	97.6 x 55 x 2.8	5.39	31	32
IPE AAAA.120	117 x 64 x 3	6.92	24	25
IPE AAAA 140	136 x 73 x 3.2	8	21	22

IPN

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
IPN 80	80 x 42 x 3.9	5.95	28	29
IPN 100	100 x 50 x 4.5	8.32	20	21
IPN 120	120 x 58 x 5.1	11.2	15	15
IPN 140	140 x 66 x 5.7	14.347	12	12
IPN 160	160 x 74 x 6.3	17.9	9	10
IPN 180	180 x 82 x 6.9	21.9	8	8
IPN 200	200 x 90 x 7.5	26.2	6	7



UPN – UAC

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
30 x 15 x 3	1.47	113	117
30 x 15 x 4	1.70	98	101
35 x 17.4 x 3	1.84	91	94
35 x 17.4 x 4	2.04	82	85
40 x 20 x 3	2.04	82	85
40 x 20 x 5	2.87	58	60
50 x 25 x 3	3.00	56	57
50 x 25 x 5	3.86	43	45
50 x 38 x 5	5.56	30	31
60 x 30 x 3.5	3.90	43	44
60 x 30 x 6	5	33	34
65 x 42 x 5.5	7.09	24	24
80 x 45 x 6	8.64	19	20
100 x 50 x 6	10.6	16	16
120 x 55 x 7	13.4	12	13
140 x 60 x 7	16	10	11
160 x 65 x 7.5	18.8	9	9
180 x 70 x 8	22	8	8
200 x 75 x 8.5	25.3	7	7

UPE

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
80 x 40 x 4.3 x 6.7	6.60	25	26
100 x 45 x 4.5 x 7.2	8.30	20	21
120 x 50 x 4.6 x 7.7	10.30	16	17
140 x 55 x 4.8 x 8	12.10	14	14
40 x 20 x 3	2.04	82	85
40 x 20 x 5	2.87	58	60
50 x 25 x 3	3.00	56	57
50 x 25 x 5	3.86	43	45
50 x 38 x 5	5.56	30	31
60 x 30 x 3.5	3.90	43	44



Square Bar

Standard: EN / ASTM / JIS


Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
7 x 7	0.385	433	448
7.5 x 7.5	0.442	377	390
8 x 8	0.502	332	343
8.5 x 8.5	0.567	294	304
9 x 9	0.636	262	271
9.5 x 9.5	0.708	235	244
10 x 10	0.785	212	220
10.5 x 10.5	0.865	193	199
11 x 11	0.95	175	181
11.5 x 11.5	1.038	161	166
12 x 12	1.13	147	153
12.5 x 12.5	1.227	136	141
13 x 13	1.327	126	130
13.5 x 13.5	1.431	116	120
14 x 14	1.539	108	112
14.5 x 14.5	1.65	101	104
15 x 15	1.766	94	98
15.5 x 15.5	1.886	88	91
16 x 16	2.01	83	86
17 x 17	2.269	73	76
18 x 18	2.543	66	68
19 x 19	2.834	59	61
20 x 20	3.14	53	55
22 x 22	3.799	44	45
25 x 25	4.906	34	35



VENCORE
ALLIANCE

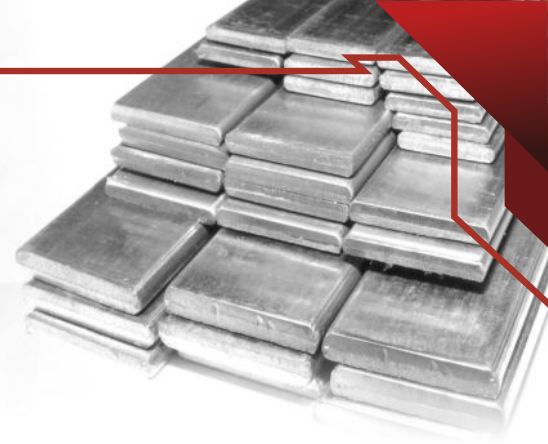

Flat Bar

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
12 x 4	0.337	495	512
12 x 5	0.417	400	413
12 x 6	0.565	295	305
14 x 3	0.33	505	522
14 x 4	0.44	379	392
14 x 5	0.55	303	313
14 x 6	0.659	253	262
15 x 3	0.353	472	488
15 x 4	0.471	354	366
15 x 5	0.589	283	293
15 x 6	0.706	236	244
16 x 3	0.377	442	457
16 x 4	0.502	332	343
16 x 5	0.628	265	275
16 x 6	0.754	221	229
16 x 8	1.005	166	172
16 x 10	1.256	133	137
18 x 3	0.424	393	407
18 x 4	0.565	295	305
18 x 5	0.706	236	244
18 x 6	0.848	197	203
20 x 3	0.471	354	366
20 x 4	0.628	265	275
20 x 5	0.785	212	220
20 x 6	0.942	177	183
20 x 8	1.256	133	137
20 x 10	1.57	106	110
25 x 3	1.962	85	88
25 x 4	0.785	212	220
25 x 5	0.98	170	176
25 x 6	1.178	141	146
25 x 8	1.57	106	110
25 x 10	1.962	85	88
30 x 3	0.706	236	244
30 x 4	0.942	177	183
30 x 5	1.178	141	146
30 x 6	1.413	118	122
30 x 8	1.884	88	92
30 x 10	2.355	71	73
40 x 3	0.942	177	183
40 x 4	1.256	133	137
40 x 5	1.57	106	110
40 x 6	1.884	88	92
40 x 8	2.512	66	69
40 x 10	3.14	53	55
50 x 3	1.178	141	146
50 x 4	1.57	106	110
50 x 5	1.962	85	88
50 x 6	2.355	71	73
50 x 8	3.14	53	55
50 x 10	3.925	42	44
60 x 6	2.826	59	61
60 x 8	3.768	44	46
60 x 10	4.71	35	37
70 x 7	3.846	43	45
70 x 8	4.396	38	39
70 x 10	5.495	30	31
80 x 6	3.768	44	46
80 x 7	4.396	38	39
80 x 8	5.024	33	34
80 x 10	6.28	27	27
80 x 12	7.536	22	23
100 x 6	4.71	35	37
100 x 8	6.28	27	27
100 x 10	7.85	21	22
100 x 12	9.42	18	18



Equal Angles

Standard: EN / ASTM / JIS


Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 /
S355 JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
19 x 19 x 1.9	0.538	310	320
20 x 20 x 3	0.879	190	196
25 x 25 x 2.5	0.939	177	184
25 x 25 x 3	1.114	150	155
25 x 25 x 4	1.452	115	119
30 x 30 x 2.5	1.15	145	150
30 x 30 x 3	1.363	122	126
30 x 30 x 4	1.779	94	97
35 x 35 x 3	1.599	104	108
35 x 35 x 4	2.093	80	82
35 x 35 x 5	2.572	65	67
40 x 40 x 3	1.844	90	93
40 x 40 x 4	2.417	69	71
40 x 40 x 5	2.974	56	58
45 x 45 x 3	2.101	79	82
45 x 45 x 4	2.753	61	63
45 x 45 x 5	3.389	49	51
50 x 50 x 3	2.326	72	74
50 x 50 x 4	3.056	55	56
50 x 50 x 5	3.77	44	46
50 x 50 x 6	4.469	37	39
60 x 60 x 4	3.696	45	47
60 x 60 x 6	5.423	31	32
65 x 65 x 7	6.827	24	25
70 x 70 x 7	7.377	23	23
75 x 75 x 5	5.76	29	30
80 x 80 x 6	7.338	23	23
80 x 80 x 7	8.492	20	20
80 x 80 x 8	9.63	17	18
80 x 80 x 9	10.753	15	16
90 x 90 x 8	10.904	15	16
90 x 90 x 9	12.183	14	14
100 x 100 x 8	12.179	14	14
100 x 100 x 10	15.037	11	11
120 x 120 x 10	18.198	9	9
120 x 120 x 12	21.62	8	8



VENCORE
ALLIANCE

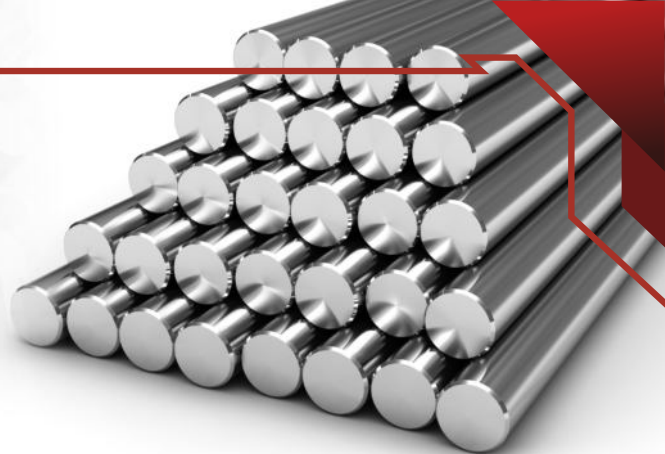


Round Bar

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
4	0.099	1,684	1,742
4.5	0.125	1,333	1,379
5	0.154	1,082	1,120
5.5	0.187	891	922
6	0.222	751	777
6.5	0.261	639	661
7	0.302	552	571
7.5	0.347	480	497
8	0.395	422	436
8.5	0.446	374	387
9	0.5	333	345
9.5	0.557	299	310
10	0.617	270	279
10.5	0.68	245	254
11	0.746	223	231
11.5	0.816	204	211
12	0.888	188	194
12.5	0.964	173	179
13	1.042	160	165
13.5	1.124	148	153
14	1.209	138	143
14.5	1.297	129	133
15	1.388	120	124
15.5	1.482	112	116
16	1.579	106	109
17	1.783	93	97
18	1.998	83	86
19	2.227	75	77
20	2.467	68	70
22	2.985	56	58
24	3.553	47	49
25	3.855	43	45
30	5.549	30	31
32	6.313	26	27
35	7.552	22	23
38	8.903	19	19
40	9.864	17	17
45	12.485	13	14
50	15.413	11	11
60	22.195	8	8
70	30.209	6	6
80	39.457	4	4

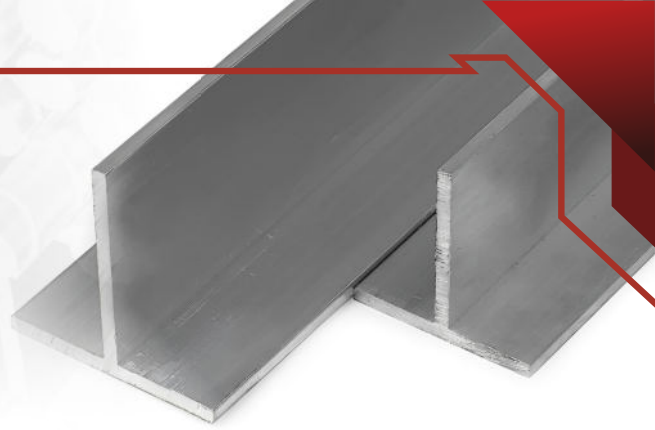


T-Bar

Standard: EN / ASTM / JIS

Commercial Grade:

A36 / A570 / A615 / A572 / GR40 / GR50 / GR60 / S235 / S275 / S355
JR-J0

Size mm	Weight (kg/m)	Pcs/ton 6m	Pcs/ton 5.80m
20 x 20 x 3	0.88	189	196
25 x 25 x 3	1.1	152	157
25 x 25 x 3.5	1.29	129	134
30 x 30 x 3	1.34	124	129
30 x 30 x 4	1.77	94	97
35 x 35 x 4	2.06	81	84
35 x 35 x 4.5	2.33	72	74
40 x 40 x 4	2.38	70	72
40 x 40 x 4.5	2.96	56	58
45 x 45 x 5.5	3.67	45	47
50 x 50 x 5	3.72	45	46
50 x 50 x 6	4.44	38	39
60 x 60 x 7	6.23	27	28
70 x 70 x 8	8.32	20	21
80 x 80 x 9	10.7	16	16
90 x 90 x 10	13.4	12	13
100 x 100 x 11	16.4	10	11
120 x 120 x 12	23.2	7	7
140 x 140 x 15	31.3	5	6

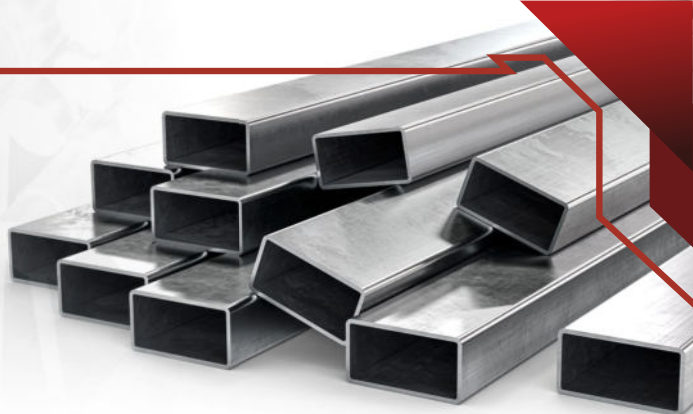

Hollow Sections and Pipes

STANDARDS		SIZE		THICKNESS		LENGTH	
		MIN	MAX	MIN	MAX	MIN	MAX
RECTANGULAR PROFILES	EN 10305-5 (TS EN 10305-5), EN 10219 (TS EN10219) CE MARKED, DIN 2395, DIN 59411, BS 6363, ASTM A 500, SI 1458, TS 5317	10x20 mm	250x300 mm	0.50 mm	13.00 mm	4 meters	14.6 meters
SQUARE PROFILES	EN 10305-5 (TS EN 10305-5), EN 10219 (TS EN10219) CE MARKED, DIN 2395, DIN 59411, BS 6363, ASTM A 500, SI 1458, TS 5317	10x10 mm	250x250 mm	0.50 mm	13.00 mm	4 meters	14.6 meters
INDUSTRIAL PIPES	EN 10305-3 (TS EN 10305-3), EN 10219 (TS EN 10219) CE MARKED, DIN 2394, DIN 1615, BS 6363, ASTM A 500, SI 1458	13.00 mm	339.70 mm	10.50 mm	13.00 mm	4 meters	14.6 meters
WATER & GAS PIPES	TS 301-1/2/3/4, EN 10255 (TS EN 10255) CE MARKED, EN 10224 (TS 9341 EN 10224) ASTM A 53, DIN 2440, DIN 2441, BS 1387, NFA 49-145, ISO 65 (TS ISO 65), UNI 8863, SI 103, SI 530, 14314, BS 4360, ASTM A 795, DIN 1623, EN 10217- 1 (TS EN 10217- 1), EN 10217-2 (TS EN 10217-2)	17.20 mm	339.70 mm	1.00 mm	13.00 mm	4 meters	14.6 meters
NATURAL GAS PIPES	API 5L PSL 1, API 5L PSL 2, API 5L PSL 2(Sour Service), API PSL 2(Offshore Service), TS 6047- 1 EN 10208-1 (EN 10208-1), TS 6047-2 EN 10208- 2 (EN 10208-2)	21.3 mm	323.7 mm	2.00 mm	13.00 mm	4 meters	14.6 meters
SCAFFOLDING PIPES	BS 1139 - EN 39	48.3 mm		3.20 mm	4.00 mm	4 meters	14.6 meters
L PROFILES	EN 10305-5 (TS EN 10305-5)	37.5x28 mm	45x33 mm	1.20 mm	1.50 mm	4 meters	12 meters
T PROFILES	EN 10305-5 (TS EN 10305-5)	37.5x28 mm	60x33 mm	1.20 mm	1.50 mm	4 meters	12 meters
Z PROFILES	EN 10305-5 (TS EN 10305-5)	50x28 mm	60x33 mm	1.20 mm	1.50 mm	4 meters	12 meters



VENCORE
ALLIANCE

Wire Mesh

Plain and Deformed

Standard and Quality:

TS 708 / NISAN 2010, ASTM A 615, BS 4449, GOST 10884 - 94, DIN 488
NF A 35 - 016, S2 738, NP 332, JS 33, CAN / CSA-G30,18-M92, ELOT 971



VENCORE
ALLIANCE



Wire and Nails

Wire



BARBED WIRE



GALVANIZED WIRE



COLD DRAWN WIRE



ANNEALED WIRE

Nails

PACKING:

5 / 10 / 25 KGS



CONSTRUCTION
NAILS



MACHINE QUALITY
NAILS



EPAL
NAILS



WIRE COLLATED
NAILS



JUMBO WINDING
NAILS



WIRE
NAIL



COATED
NAILS



JOIST HANGER
NAILS



HIGH CARBON
NAILS